


ENGINEERING & ARCHITECTURAL SPECIFICATION

DOORCHEK 7010/LCD FULL PAGE ELECTRONIC DIRECTORY

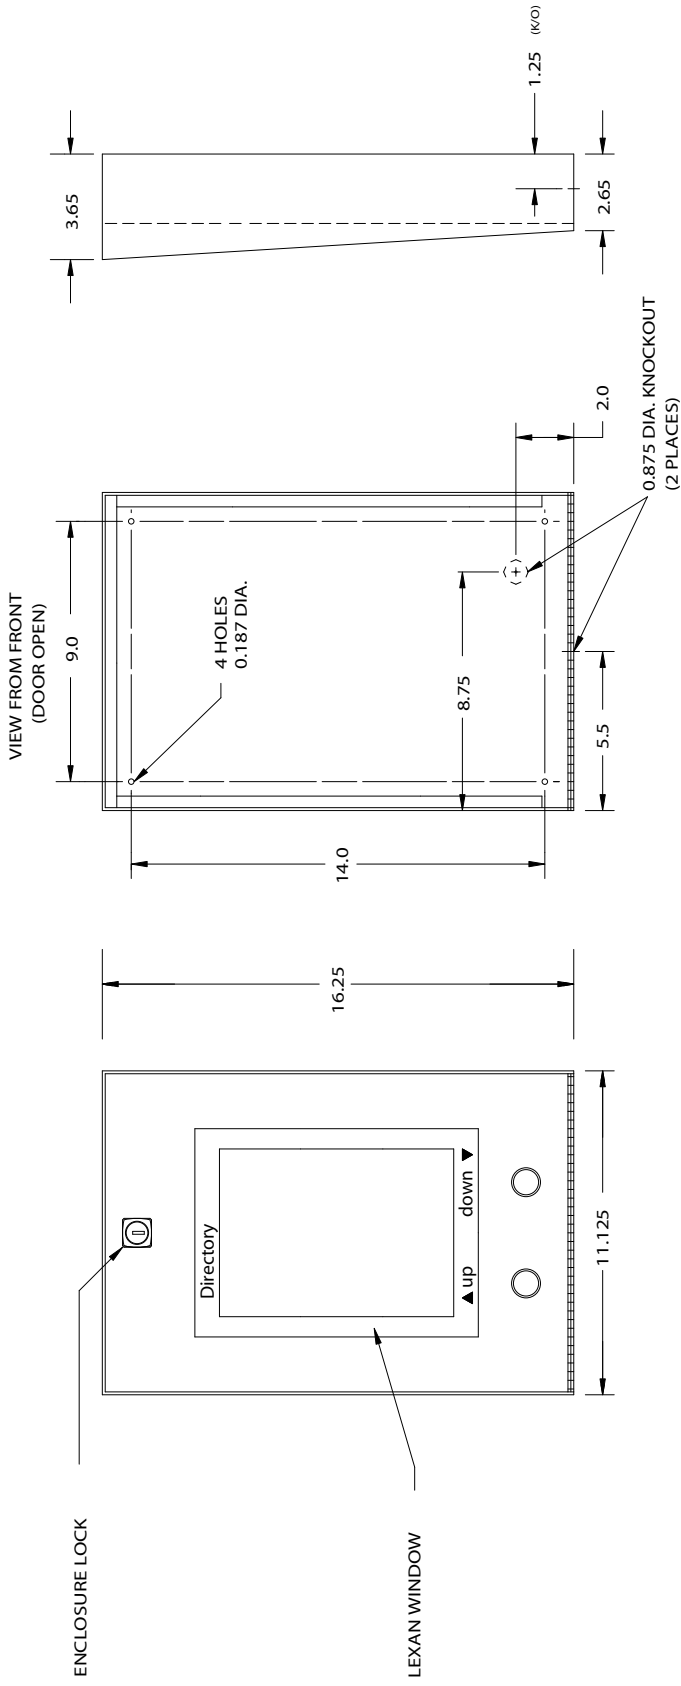

SYSTEM CONSTRUCTION & SPECIFICATIONS

ENCLOSURE:

- ◆ Surface Mounted Enclosure
- ◆ Weather Resistant Construction
- ◆ Rugged 16 Ga. Stainless Steel Faceplate
- ◆ Hinged, Lockable Door

DISPLAY:

- ◆ High-Contrast Backlit LCD Display
- ◆ Wide-Angle, "Supertwist" design for superior readability

SPECIFICATIONS:

INPUT: 16 VAC, Min. 30VA

UL/CSA Class 2 Transformer

OPERATING TEMP: 0°C to +50°C

FEATURES:

- ◆ 1000 Name Capacity
- ◆ 20 Names per Page
- ◆ 25 Characters per Name Field
- ◆ 1 to 4 Digits per Code
- ◆ 18 Line Programmable Title Page with 30 Characters per Line
- ◆ Upper and Lower Case Fonts
- ◆ 26 Point Font Size
- ◆ Slim or Bold Font Selection
- ◆ Reverse Screen Option
- ◆ Auto Sorting by Name or Code
- ◆ IBM PC/XT Style Keyboard for Programming
- ◆ Remote Programming via RS232 Link (up to 5 km)

ES&P Corporation

1 Bradwick Drive, Unit 8
Concord, Ontario, Canada L4K 2T4
Tel: (905) 738-6855 Fax: (905) 738-8116