


ENGINEERING & ARCHITECTURAL SPECIFICATION  
DOORGUARD 550ES NPL LOBBY ENTRY PANEL

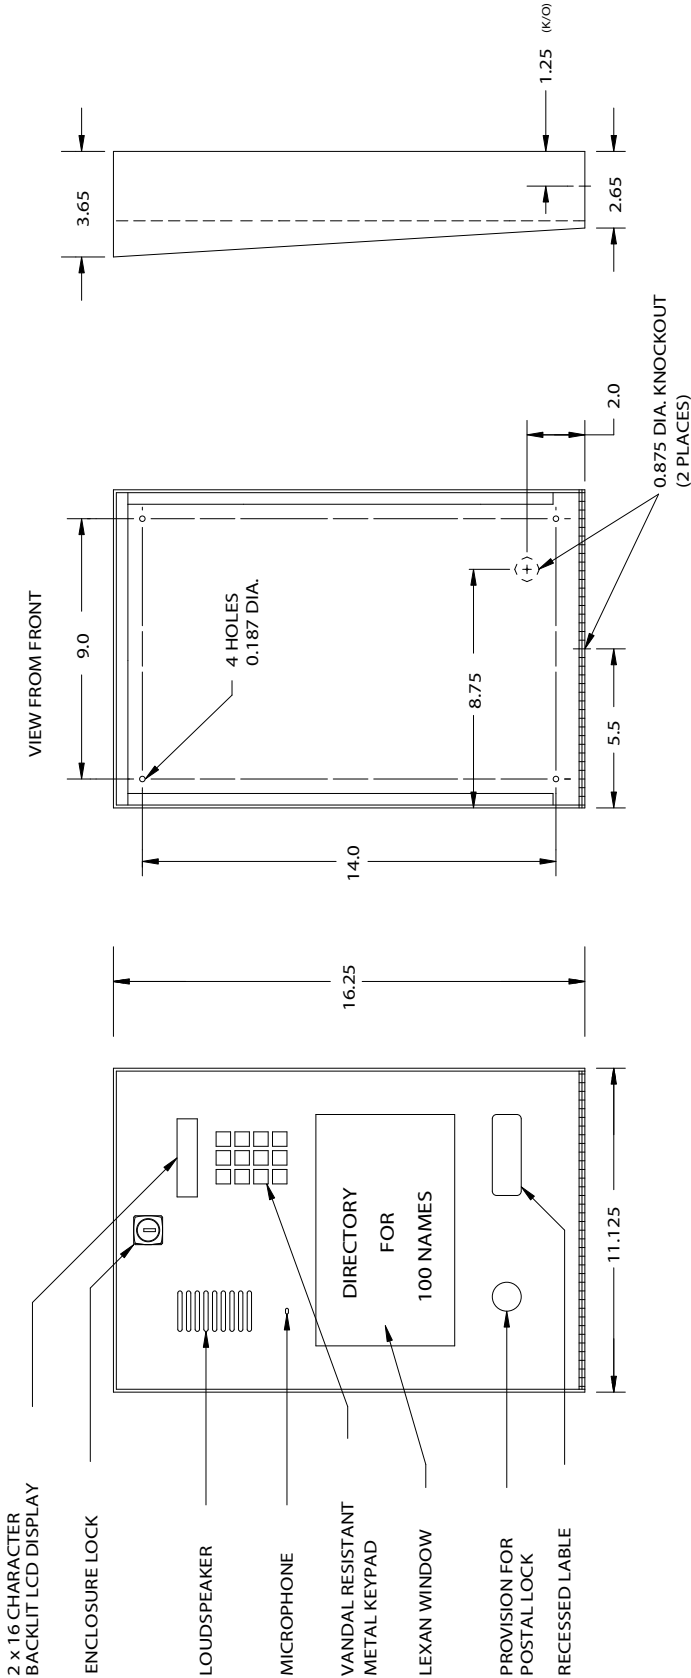

SYSTEM CONSTRUCTION & SPECIFICATIONS

ENCLOSURE:

- ◆ Surface Mounted Enclosure
- ◆ Weather Resistant Construction
- ◆ Rugged 16 Ga. Stainless Steel Faceplate
- ◆ Hinged, Lockable Door
- ◆ Built-in Directory for up to 100 Names

KEYPAD:

- ◆ Zinc Die-Cast Construction
- ◆ Marine Quality Chrome Plating
- ◆ Gold Plated Switch Contacts

DISPLAY:

- ◆ High-Contrast Backlit LCD Display
- ◆ Wide-Angle, "Supertwist" design for superior readability

AUDIO:

- ◆ Handsfree or Optional Handset Operation
- ◆ Sensitive Electret Microphone
- ◆ Large 3.5" Loudspeaker
- ◆ Protected to Resist Tampering
- ◆ Speaker & Microphone Volume Adjustments

SPECIFICATIONS:

INPUT - Class 2 Transformer, 16VAC, 20VA Min.

DOOR STRIKE - Class 2 Transformer

28V / 3 AMP. MAX. AC or DC

OPERATING TEMP: -20°C to +50°C

APPROVALS:

DOC - 1949 5630 A

FCC - Registered Part 15 & Part 68

ES&P Corporation

1 Bradwick Drive, Unit 8  
Concord, Ontario, Canada L4K 2T4  
Tel: (905) 738-6855 Fax: (905) 738-8116